



APOLLO INSTALLATION INSTRUCTIONS—100-277V / 347-480V AC

WARNING: DISCONNECT POWER DURING INSTALLATION AND BEFORE SERVICING

READ ALL INSTRUCTIONS COMPLETELY BEFORE STARTING INSTALLATION

IMPORTANT


This unit should not be used in areas with limited ventilation or high-ambient temperatures. Installation to be done by a qualified electrician.

WARNING

- Make sure power is OFF before installing or maintaining fixture
- Fixture should not be recessed and must be positioned with lamp in horizontal position
- A listed strain relief cable suitable for gauge of cord to be used for suspending the fixture (not included)

INSTALLATION AND WIRING

1. Install mounting ring both on the fixture and mounting surface, or use the steel wire to install on preexisting ceiling hook. Hook and ring are not included and need to be purchased separately. See Fig A
2. Terminate wire connections and connect black wire to L, white to N, green to E. See Fig B
3. Secure unit to the mounting surface

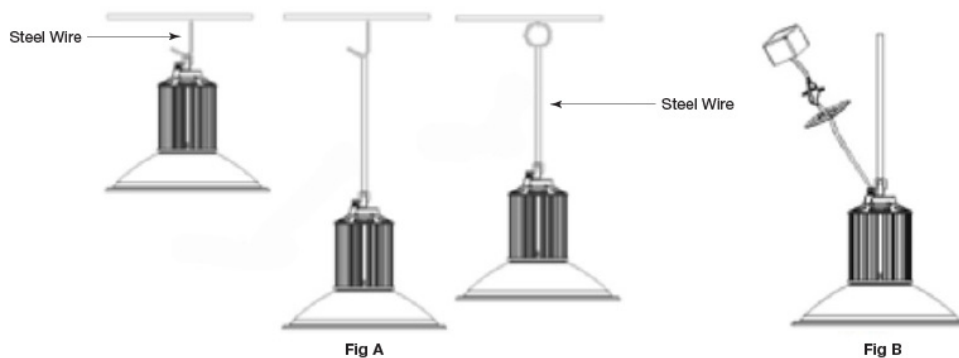

MAINTENANCE

This unit is designed for years of maintenance free operation. When cleaning the fixture, ensure power turned off and do not spray liquid cleaner directly onto the LED, socket or wiring

If the fixture does not work, make sure the power is off before inspection only by a qualified electrician