




DANTE




Proiettore ad incasso per interni ed esterni. Corpo in alluminio trafilato ossidato, vetro temperato trasparente spessore 5 mm, guarnizione in silicone, fornito con cornice in lamiera d'acciaio, verniciato con polveri epossipoliesteri di colore bianco e antigiallente, con pretrattamento di fosfatazione e sgrassaggio. Montaggio a staffe (incluse nella confezione), alimentatore elettronico 230V. Prodotto in conformità alle vigenti norme EN / IEC 60598-1:2015.


Indoor and outdoor recessed floodlight. Extruded aluminium oxydate body, tempered transparent glass mm 5 thickness, silicon gasket, equipped with stainless steel body frame, painted with white epoxy polyester powders anti-yellowing epoxy polyester powders anti-yellowing. Brackets installation (included in the packaging), electronic ballast 230V. Fittings manufactured according to the EN / IEC 60598-1:2008 rules.

CODIFICA/CODE

Art.	+	Mod.	+	°K	+	W-tot	+	Opt.
2081		04		4 = 4000°K		050		EL = standard
		08		5 = 5000°K		075		LM = 1-10v
		16				125		LD = dali
						145		

DIMENSIONI/DIMENSION

	A	B	C	Kg	mc		
D1	455	455	120	7,5	0,027	1	40

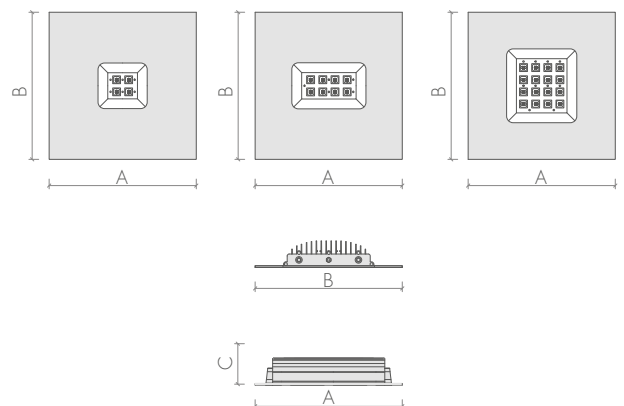



mod/04

Offiche e diffusori
Lenti diffondenti 100° in PMMA.

Louvers and diffusers
Diffusion lenses 100° PMMA.

- 4000°K = standard
- 5000°K = +2.00% lm



IP65 850° IK08

W-Tot.	Lm (Tc=25°) 4000°K	Lm (Output)	Sost.	Dimension
50	6565	5561	500W halog.	D1



mod/08

Offiche e diffusori
Lenti diffondenti 100° in PMMA.

Louvers and diffusers
Diffusion lenses 100° PMMA.

- 4000°K = standard
- 5000°K = +2.00% lm



IP65 850° IK08

W-Tot.	Lm (Tc=25°) 4000°K	Lm (Output)	Sost.	Dimension
75	10386	8797	150W JM-MH	D1




mod/16

Offiche e diffusori
Lenti diffondenti 100° in PMMA.

Louvers and diffusers
Diffusion lenses 100° PMMA.

- 4000°K = standard
- 5000°K = +2.00% lm



IP65 850° IK08

W-Tot.	Lm (Tc=25°) 4000°K	Lm (Output)	Sost.	Dimension
125	17424	14758	250W JM-MH	D1
145	18968	16066	250W SAP-HPS	D1