

# DOMUS

LED Post Top Luminaire



**Applications:** Pedestrian areas, parks, mall walkways, courtyards, campuses, civic and government

## PERFORMANCE SUMMARY

The Domus side entry luminaire is the perfect choice for urban environments where aesthetics and visual comfort are needed. With clean smooth lines that blend harmoniously into any architectural space, the low-profile shape of Domus is elegant, yet unobtrusive

Tailored for campuses, parks, pedestrian malls, courtyards and pathways, the Domus side entry is an architectural solution creating beautiful aesthetics both in day and night form

## Construction

- Clean, smooth design blends harmoniously into outdoor environments
- Heavy duty injection die cast aluminium housing and cover
- UV stabilised polyester powdercoat finish for durability and corrosion resistance. Available in matt black (standard), bronze, or white finishes
- Excellent thermal management
- 5mm tempered glass lens

## Optics

- Precision optical control delivers 4 distributions in type II, III, IV, V
- Engineered individual lenses made of optical grade polycarbonate for maximum light efficiency
- Dark sky friendly with minimal uplight of less than 5% total lumen output illuminating above 900mm

## Electrical


- Philips SPD (10kV) built in surge protection device
- Class 1 dimmable electronic driver with PF > 90%, THD < 20%, 50,000hrs servicable life with < 1% failure rate
- Lumileds 3030 light engine mounted to a stainless steel heatsink ensuring optimal thermal management and long life

## Specification

Volts: AC120-277V  
 PF: > 0.90  
 Average Rated Life: 50,000hrs  
 CRI: RA70  
 Environment Location: IP65  
 Ambient Temp: -20°F to 113°F  
 Mounting: Ø42/60/76mm



## DIMENSIONS

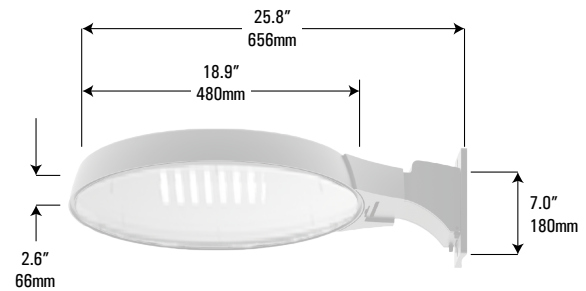

## OPTIONS



**TE**  
Top Entry



**PB**  
Pole Bracket



**WB**  
Wall Bracket

## PRODUCT CODE

Example Domus cat. 60.T3.35.PB.BL

Model No	Wattage (W)	Distribution	CCT (°K)	Mounting	Finish
Domus	30 - 30W/3,600 lms	T2 - Type 2	3 - 3000	PB - Pole Bracket	BL - Matt Black
	60 - 60W/7,200 lms	T3 - Type 3	35 - 3500	WB - Wall Bracket	BR - Bronze
	90 - 90W/10,800lms	T4 - Type 4	4 - 4000	TE - Top Entry	W - White
	150 - 150W/18,000 lms	T5 - Type 5	5 - 5000		

