

EXCALIBRE MOD/2

Architectural LED Bollard



Applications: Corporate offices, civic and government, education and healthcare, parks and pathway, urban environments

PERFORMANCE SUMMARY

The Excalibre Mod/2 series of LED bollards comes with a 360° shielded distribution available in various heights and options. Rugged extruded cast construction with durable finish and long life LEDs assures years of durability and maintenance free operation

With an indirect low impact light source this full cut off luminaire will meet the most demanding of lighting codes, performing the way a bollard should


Features

- Premium driver provides unsurpassed system efficiency
- Surface finished with a proprietary Akzo Nobel treatment, withstanding harsh weather conditions without cracking or peeling
- Corrosion and shock resistant die cast aluminium housing
- Available in a range of lumens packages up to 3,150 lms
- 360° circular symmetric distribution
- Lower housing one piece, heavy walled, extruded die cast thick aluminium for added vandal resistance.
- Available in marine ambient corrosion resistant option for installation in seaside areas

Specification

Volts: AC100-277V
 Environment Location: IP65
 Average Rated Life: 90,000
 CRI: RA80/90
 PF: > 0.95
 Ambient temp: -20°C to 45°F

ANCHOR BOLT DETAIL

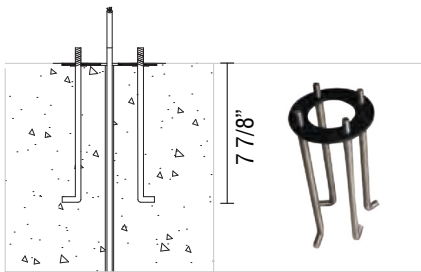

*Four anchor bolts included as standard


PRODUCT CODE

Example Excalibre Mod/2 cat. 10.24.80.3.B.M

Model No	Wattage	Height	CRI	CCT (°K)	Finish	Options
Excalibre Mod/2	10 - 10W/900lms	24 - 24"	80 - RA80	3 - 3000	B - Black RAL9011	M - Marine grade corrosion resistance DIM - 0-10v Dimming 0 - None
		32 - 32"	90 - RA90	4 - 4000	W - White RAL9016	
	20 - 20W/1,800lms	36 - 36"		5 - 5000	G - Gray RAL7012	
		36 - 36"			Z - Bronze	
	35 - 35W/3,150lms	36 - 36"			S - Silver RAL9006	
		42 - 42"				



PHOTOMETRICS

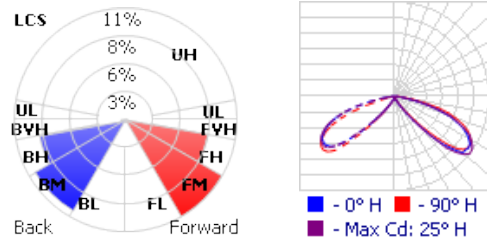

*Dimmable available in 20/25W

DIMENSIONS

