




MASTER





Riflettore industriale e commerciale a sospensione. Corpo in alluminio trafilato ossidato. Alimentatore elettronico 230V. Prodotto costruito in conformità alle vigenti norme EN / IEC 60598-1:2015.

Industrial and commercial suspended high-bay. Body extruded aluminium oxydate. Electronic ballast 230V. Fitting manufactured according to the EN / IEC 60598-1:2015 rules.

CODIFICA/CODE


Art.	+	Mod.	+	°K	+	W-tot	+	Opt.
8200		SQ		4 = 4000°K		080		EL = standard
		SR		5 = 5000°K		100		LM = 1-10v
		CQ				150		LD = dali
		CR				200		E1 = em-1h

DIMENSIONI/DIMENSION

	A	B	C	Kg	mc		
D1	125	450	92	4,5	0,006	1	50
D2	405	350	120	5,5	0,019	1	50
D3	405	450	120	6,5	0,025	1	50
D4	125	900	92	6,5	0,013	1	50

MOD.SR-CR

MOD.SQ-CQ

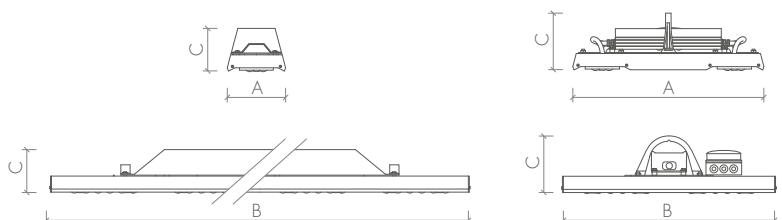

mod/SQ


Ottiche e diffusori

Lente diffondente 110° in PMMA.

Louvers and diffusers

Diffusion lens 110° in PMMA.

- 4000°K = standard
- 5000°K = +0.40% lm



IP65 850° IK08

W-Tot.	Lm (Tc=25°) 4000°K	Lm (Output)	Sost.	Dimension
80	12620	10348	150W JM-MH	D2
100	14760	12103	150W SAP-HPS	D2
150	23760	19483	250W JM-MH	D3
200	30200	24764	400W JM-MH	D3

mod/SR


Ottiche e diffusori

Lente diffondente 110° in PMMA.

Louvers and diffusers

Diffusion lens 110° in PMMA.

- 4000°K = standard
- 5000°K = +0.40% lm



IP65 850° IK08

W-Tot.	Lm (Tc=25°) 4000°K	Lm (Output)	Sost.	Dimension
80	12620	10348	150W JM-MH	D1
100	14760	12103	150W SAP-HPS	D1
150	23760	19483	250W JM-MH	D4
200	30200	24764	400W JM-MH	D4

mod/CQ


Ottiche e diffusori

Lente concentrante 30° in PMMA.

Louvers and diffusers

Narrow beam 30° lenses in PMMA.

- 4000°K = standard
- 5000°K = +0.40% lm



IP65 850° IK08

W-Tot.	Lm (Tc=25°) 4000°K	Lm (Output)	Sost.	Dimension
80	12620	10096	150W JM-MH	D2
100	14760	11808	150W SAP-HPS	D2
150	23760	19008	250W JM-MH	D3
200	30200	24160	400W JM-MH	D3

mod/CR


Ottiche e diffusori

Lente concentrante 30° in PMMA.

Louvers and diffusers

Narrow beam 30° lenses in PMMA.

- 4000°K = standard
- 5000°K = +0.40% lm



IP65 850° IK08

W-Tot.	Lm (Tc=25°) 4000°K	Lm (Output)	Sost.	Dimension
80	12620	10096	150W JM-MH	D1
100	14760	11808	150W SAP-HPS	D1
150	23760	19008	250W JM-MH	D4
200	30200	24160	400W JM-MH	D4