

# PATRIOT

Wall Mount Luminaire



**Applications:** Pathway and perimeter lighting, access ramps, loading docks, building entryways, strip malls and much more

## PERFORMANCE SUMMARY

With an architectural variation of a familiar classic, the Patriot Series from Sunled is ideal for providing the flexibility and form needed to compliment a wide range of surroundings at an affordable price

The Patriot Series wall lights utilize glare free LED and reflector technology, producing smoother and whiter light resulting in more lumens on the ground, making it the best choice when replacing traditional glass wall packs

## Construction

- Architectural redesign of traditional shape blends harmoniously into outdoor environments
- Durable extruded die cast aluminium housing
- Detachable mounting plate fits most standard junction boxes or can be surface mounted and wired via conduit entries
- Finished in a multi-stage thermoset finish, ensuring superior resistance from corrosion and weathering

## Optics

- Engineered internal LED assembly precisely and efficiently directs light at desired locations, eliminating glare and offensive light
- High impact borscillate prismatic glass lens creates an appealing nighttime look and maximises delivered lamp lumens
- Unique internal design allows for lower operating temperatures resulting in a brighter, whiter light, stable colour and longer driver life
- IP65 lens completely sealed from moisture suitable for hose down applications

## Electrical

- 120-277VAC or 277-347VAC
- Internal power rotary dial for on site lumen adjustment
- Average rated life L70: 54,000H
- 4kV surge protection
- Operating Temperature: -40°F to 176°F
- Optional button photocell or motion sensor control
- PF: > 0.9 THD: <20%
- 0-10V dimmable


## PRODUCT CODE

Example Patriot cat. 120.100+PS.3.0.BR.0

Model No	Voltage	Wattage (W)	CCT (°K)	Control	Finish	Emergency	
Patriot	120 - 120-277V	30 - 30W/3,750 lms	345 - CCT Changeable 3000/4000/5000K	PC - Photocell	BR - Bronze	EM - 8W/90min Emergency	
		40 - 40W/5,000 lms					
	347 - 277-347V	60 - 60W/7,500 lms	3 - 3000	MS - Microwave Motion Sensor	BK - Black	0 - None	
		80 - 80W/10,000 lms	4 - 4000				
		100 - 100W/12,500 lms	5 - 5000				
			120 - 120W/15,000 lms				
			+PS - 25/50/75% Power Selectable				



## PHOTOMETRICS

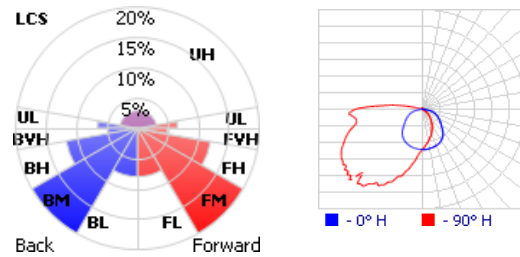

## DIMENSIONS

Weight (May vary with accessories)  
11.0lbs (5.0kg)

