

PREZIO

Facade Floodlight



Applications: Building perimeters, bars & shopping malls, corporate offices building facades & entrances architectural

PERFORMANCE SUMMARY

The Sunled Prezio facade floodlight is a lighting solution that offers high-performance with an exhaustive range of options

An adjustable bracket allows for a complete 180° rotation of Prezio, makes it perfect for decorating outdoor environments such as entrances of shops, architectural attractions and building facades

Features


- Durable extruded die cast aluminium housing
- Tempered glass lens cover
- Surface finished with a proprietary Akzo Nobel treatment, withstanding harsh weather conditions without cracking or peeling
- Multitude of mounting applications for use in commercial and residential facade applications
- Extensive range of accessories
- Dimmable

Specification

Volts: AC100-277V or 24V DC
 Environment Location: IP65
 Average Rated Life: 90,000
 Ambient temp: -20°C to 45°F
 CRI: RA80
 PF: > 0.95



ACCESSORIES

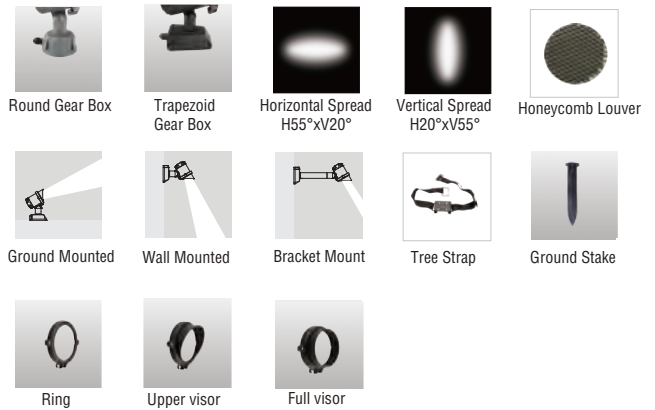

PRODUCT CODE

Example Prezio I cat. C6.3.S.15.CR.R.B.P

Model No	Wattage	CCT (K)	Cable Entry	Beam Angle	Cover Frame	Gear Box	Housing Color	Accessories
Prezio I	C6 - 6W	3 - 3000	B - Bottom	15 - 15°	CR - Ring	R - Round	B - Black RAL9011	S - Ground Stake
	C11 - 11W	4 - 4000	S - Side	30 - 30°	CV - Top Visor	T - Trapezoid	W - White RAL9016	P - Tree Strap
Prezio II	C20 - 20W	5 - 5000		45 - 45°	CF - Full Visor		G - Gray RAL7012	H - Honeycomb Louver
	C27 - 27W			H - H55°xV20°			M - Marine Treatment	
Prezio III	C36 - 48W			V - H20°xV55°			M - Mineral Bronze	B2 - 2ft Bracket
	C48 - 48W						S - Silver RAL9006	B3 - 3ft Bracket
								B6 - 6ft Bracket
								0 - None




PREZIO

Facade Floodlight

DIMENSIONS


Prezio I

Weight: (May vary with accessories)
3.5lbs (1.6kg)

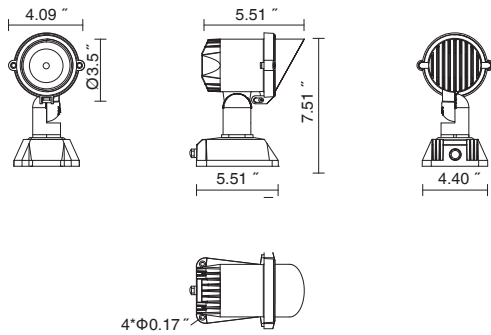


Prezio II

Weight: 6.8lbs (3.1kg)

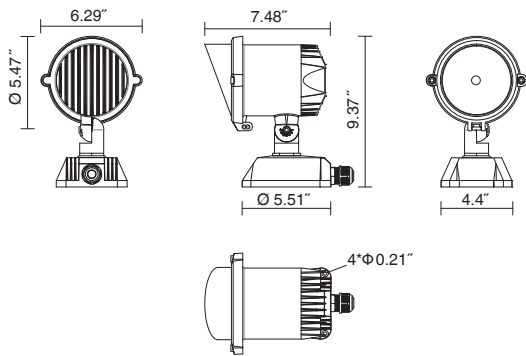

Prezio III

Weight: 9.7lbs (4.4kg)

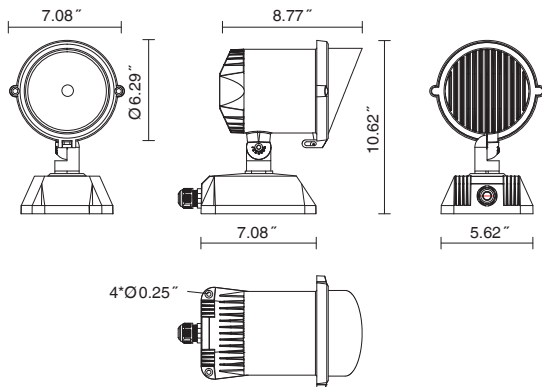

BEAM ANGLE

