

PRO5 NANO


Linear LED Strip Light

INSTALLATION

Warning


- 1 Switch off power before installation / maintenance.
- 2 Switch on power only after finished installation and examination circuits.
- 3 Use professional electrician for installation and maintenance only.

Turn off power supply before starting any installation. Read instructions and check you have all the tools and accessories to complete the installation correctly.




Suspended

(1)

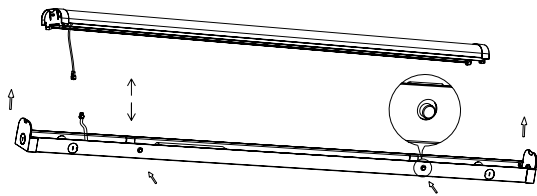


Take out the lamp, press the snap-on button and remove the cover.

(2)

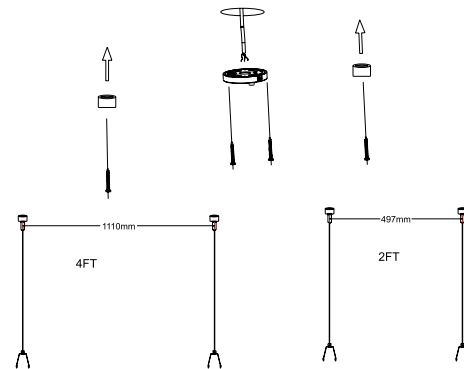


Fasten the holder and self-lock device on the ceiling.

(3)

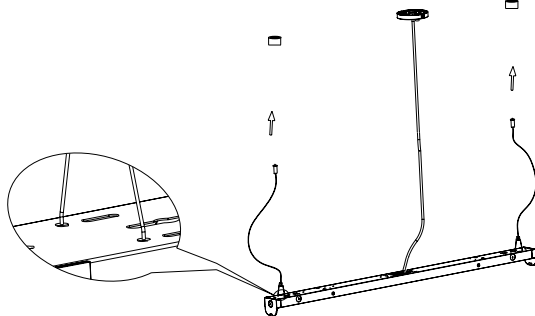


Lock the steel rope into the fixture bracket, fix the end of the steel rope into the holder, then thread AC wire through the bracket.

(4)

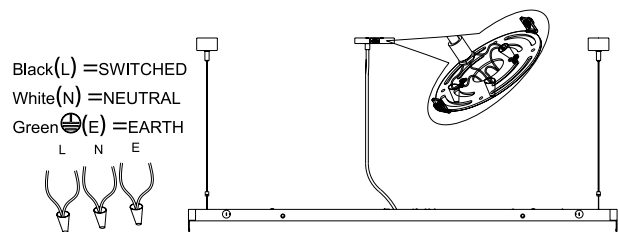


Connect AC wires accordingly

(5)

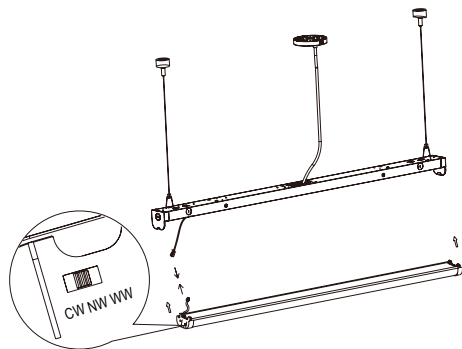

Adjust desired CCT using the slider switch, connect DC plug, then buckle the fixture cover.

(6)

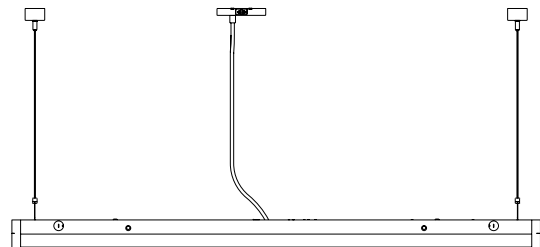


Turn on

PRO5 NANO

Linear LED Strip Light


Linkable (Wall/Surface)

(1)

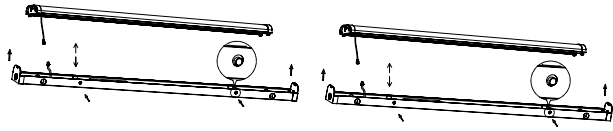


Take out the lamp, press the snap-on button and remove the cover.

(2)

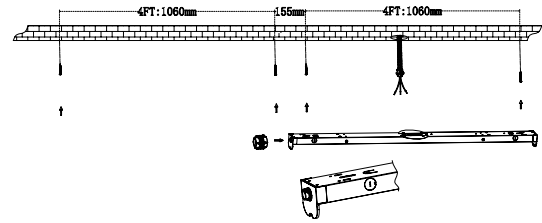


Fix the screws on the ceiling or wall according to the distance of the mounting hole; thread the connector into the end cover.

(3)

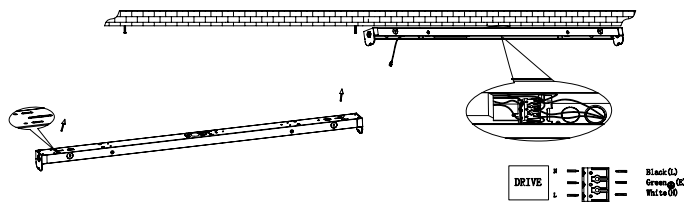


Fix the first fixture's mounting bracket on the ceiling, connect main power of the fixture, then fix the second fixture with the first fixture.

(4)

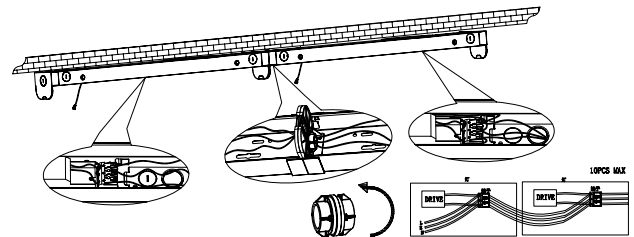


Fix the first fixture's mounting bracket on the ceiling, connect mains power of the fixture, then fix the second fixture with the first fixture.

(5)

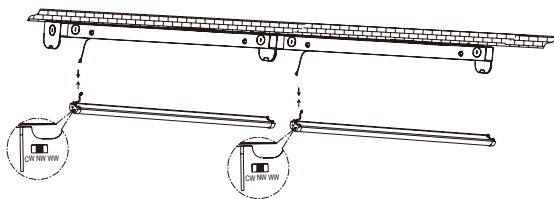

Adjust desired CCT using the slider switch, connect DC plug, then buckle the fixture cover.

(6)




Turn on

PRO5 NANO

Linear LED Strip Light


Wall Mounted

(1)

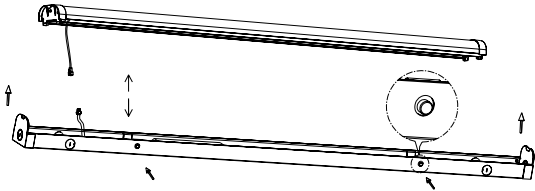


Take out the lamp, press the snap-on button and remove the cover.

(2)

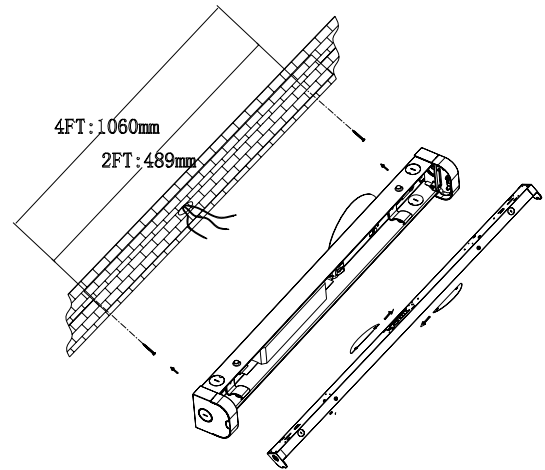


Install sheet metal to cover the junction box, semi-lock the screws into wall.

(3)

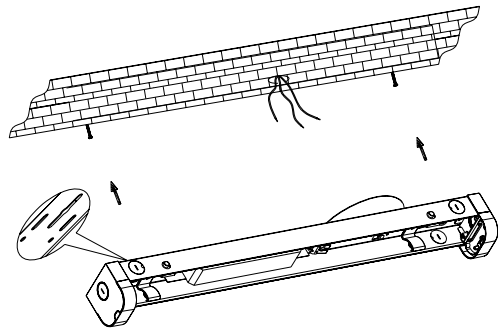


Align and hang the mounting holes of the fixture bracket with the screws on the wall, then tighten the screws again.

(4)

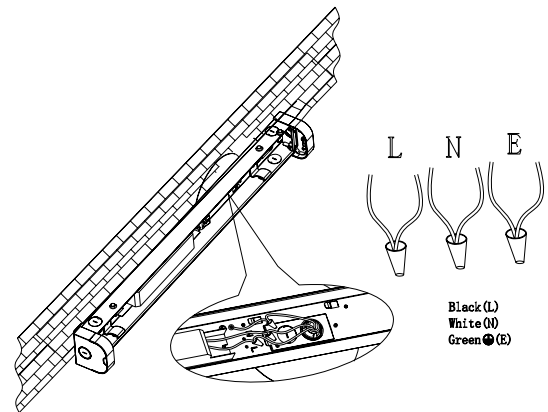


Connect AC wires accordingly.

(5)

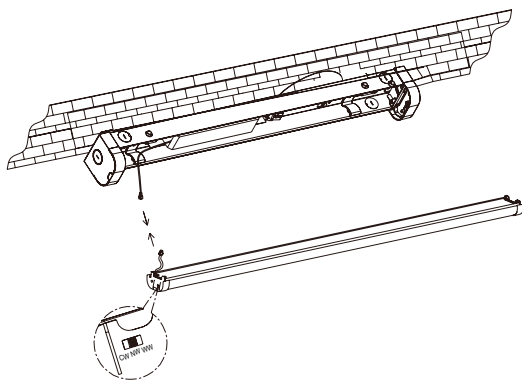

Adjust desired CCT using the slider switch, connect DC plug, then buckle the fixture cover.

(6)

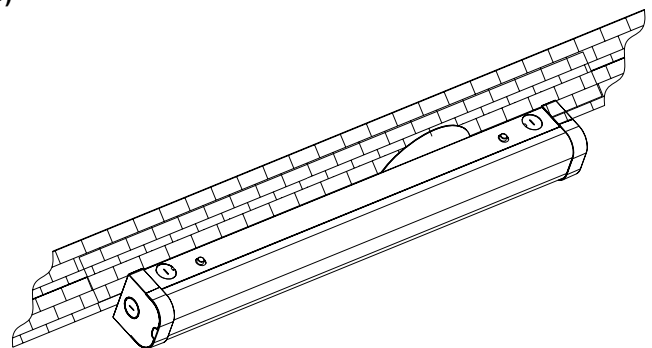

Turn on