

SLATE MOD/1

Full Cutoff Wallpack



Applications: Building perimeter areas, petrol stations, retail and grocery, residential, industrial and warehouse

PERFORMANCE SUMMARY

Whether you are trying to meet specification, code, or seeking a building mount solution with the right options, the Slate Series was designed to provide optimal wall lighting solutions for all heights.

With clean lines, it blends seamlessly into any architecture, meeting the everyday lighting needs of engineers and architects alike. The Slate comes in a wide of forward distribution and 1,700 to 5,200 lumens packages with optional photocell control

Construction

- Easy installation using a galvanised wall plate mounting directly to junction box or 1/2" entry conduit
- Tempered glass lens
- Durable extruded heavy duty die cast aluminium housing
- Surface finished with a proprietary Akzo Nobel treatment, withstanding harsh weather conditions without cracking or peeling
- Different body sizes for building, facade or general perimeter illumination applications

Optical

- Dark sky friendly with minimal uplight of less than 5% total lumen output illuminating above 900
- Available in T2/T3/T4 distribution options for precise optical control
- Engineered polycarbonate lens providing superior light output
- Long life aluminium PCB with added corrosion resistance for enhancing protection against moisture and contaminants
- Delivered lighting output up to 8,900 median lumens

Electrical

- 120-277VAC driver
- 60,000hrs average rated life
- PF: > 0.9 THD: <20% CRI: RA80
- Operating Temperature: -22°F to 122°F
- 0-10V dimmable
- Embedded photocell option

PRODUCT CODE

Example Slate Mod/1 cat. T3.18.B.4.DIM.0

Model No	Distribution	Wattage	Finish	CCT (°K)	Options	Emergency
Slate Mod/1	T2 - Type 2	18 - 18W/1,700lms	B - Black	3 - 3000	M - Marine resistance	EM - Emergency Backup
	T3 - Type 3	23 - 23W/2,300lms	RAL9011	4 - 4000	DIM - 0-10V dimming	0 - None
	T4 - Type 4	28 - 28W/2,700lms	W - White	5 - 5000	PE - Photocell	
		36 - 36W/3,600lms	RAL9016		0 - None	
		44 - 44W/4,400lms	G - Gray			
		54 - 54W/5,200lms	RAL7012			
			M - Mineral Bronze			
			S - Silver			
			RAL9006			




Specification	
Lumen Package	1,700 - 5,200
Wattage Range	18 - 54
Efficacy	96
Weight lbs (kg)	6.2 (2.8) - 11.0 (5.0)

DIMENSIONS


36-54W

Weight: 11.0lbs (5.0kg)

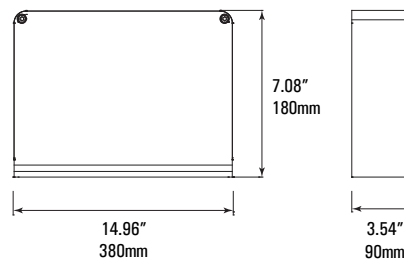

18-28W

Weight: 6.2lbs (2.8kg)

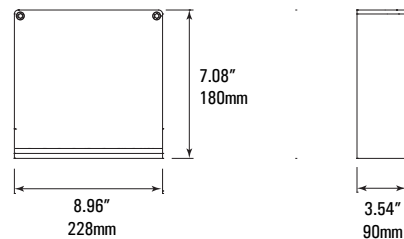


SLATE MOD/1


Full Cutoff Wallpack

PHOTOMETRICS

Type 2

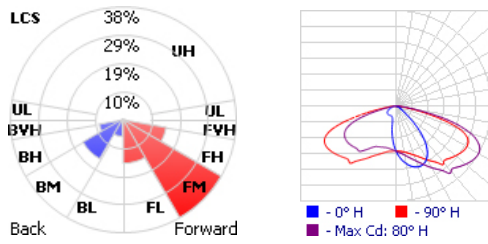

Type 3

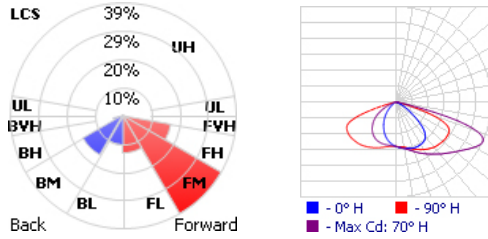

Type 4

