

# SOLACE MOD/1

Spec Grade LED Bollard



**Applications:** Corporate offices, civic and government, education and healthcare, parks and pathway, urban environments

## PERFORMANCE SUMMARY

Durable die-cast aluminum luminaire housing mounts directly to 8" (200mm) diameter pole (included) without visible mounting hardware for clean appearance. Pole mounts to rugged die cast aluminum internal flange secured by four 3/8" – 7-7/8" anchor bolts and hook (provided).


## Features

- Premium driver provides unsurpassed system efficiency, control and protection.
- Surface finished with a proprietary Akzo Nobel treatment, withstanding harsh weather conditions without cracking or peeling
- Corrosion and shock resistant die cast aluminium housing
- Available in high power model up to 3,200 lms
- 360° distribution
- Tempered glass lens for added vandal resistance
- Available in marine ambient corrosion resistant option for installation in seaside areas

## Specification

Volts: AC100-277V  
 Environment Location: IP65  
 Average Rated Life: 90,000  
 CRI: RA80/90  
 PF: > 0.95  
 Ambient temp: -20°C to 45°F

## ANCHOR BOLT DETAIL

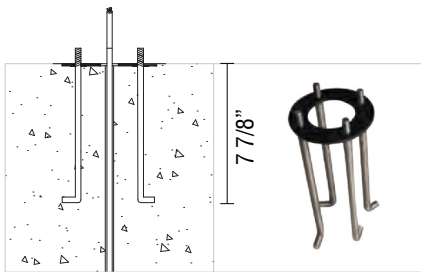

\*Four anchor bolts included as standard

## PRODUCT CODE


Example Solace Mod/1A cat. 20B3M

Model No	Mod	Wattage	Finish	Color Temperature (°K)	Options
Solace	1A - 36"H x 8"dia	20 - 20W/2,000lms	B - Black	3 - 3000	M - Marine Treatment
		32 - 32W/3,200lms	RAL9011	4 - 4000	
	1B - 42"H x 8"dia	32 - 32W/3,200lms	W - White	5 - 5000	DIM - 0-10V Dimming
			RAL9016		
			G - Gray		
			RAL7012		
			M - Mineral		
			Bronze		
			S - Silver		
			RAL9006		



## PHOTOMETRICS

Solace Mod/1

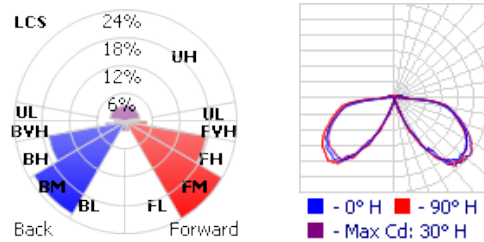

## DIMENSIONS

