

PRO5

Tri Proof LED Batten



Applications: Commercial, residential, educational facilities, industrial and warehouse, amenity areas, hospitals

PERFORMANCE SUMMARY

The Sunled PRO5 Series is ideal for flexible deployment in economical lighting structures. The PRO5 design is suitable for ceiling, pendant and trunking rail mounting.

PRO5 has been developed with durability in mind with a rugged shatter proof lamp cover and inside prisms for excellent edge stability. PRO5 Tri offers unique uniform light distribution that ensures a glare-free environment.

Features


- Refined slimline appearance for everyday lighting needs
- High impact polyester housing and polycarbonate diffuser with IK10 protection rating
- Glare free diffuser for uniform light distribution
- Age resistant silicon gasket seals
- Quickfit bracket or optional suspension kit for simple installation
- Series linkable plug and play connection capability
- Cable entry knock out on both sides with quick release end caps
- Emergency battery backup, motion sensor and daylight sensors smart control options

Specification


Volts: AC100-277V
 Average Rated Life: L70/50,000hrs
 CRI: RA80
 Beam Angle: 120°
 Environment Location: IP65
 Ambient Temp: -4°F to 122°F
 Emergency: 2hr/18W/6000mAh
 Impact Rating: IK10



DIMENSIONS

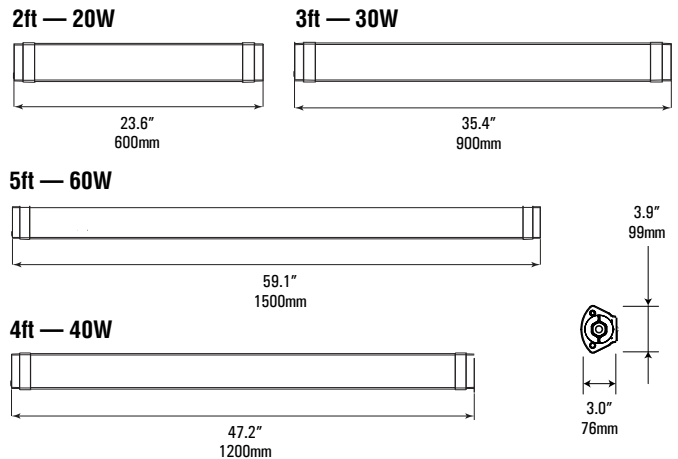

PHOTOMETRICS

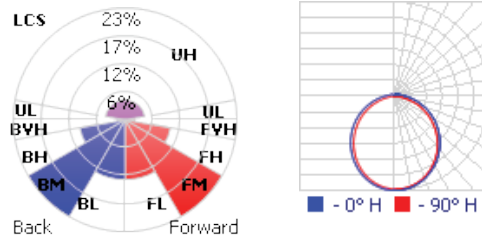

PRODUCT CODE

Example PRO5 cat. 4L.40.L.5.SS.M

Model No	Length	Wattage (W)	Connectors	CCT (°K)	Mounting	Control
Pro5	2L - 2'	20 - 20W/2,400 lms	0 - None	3 - 3000	S - Surface	EM - Emergency Battery Backup
	3L - 3'	30 - 30W/3,600 lms	L - Linkable Serial	4 - 4000	SS - Suspended	M - Motion Sensor
	4L - 4'	40 - 40W/4,800 lms		5 - 5000		0 - None
	5L - 5'	60 - 60W/7,200 lms		57 - 5700		

