



QS-AMR



FEATURES

- Integral receptacle base as standard compatible with plug and play sensors
- Modern narrow profile design compliments confined surroundings
- Flat PMMA vandal resistant lens eliminates glare while maintaining efficiency with over 90% transmittance rate
- Watt and CCT selectable
- Surface or pendant mount
- Die-cast aluminum housing with die-cast backbox including four conduit entry points and knockout pattern for junction box or direct wall mounting.
- Hinged door for easy re assembly
- Wide beam angle of 150°

SPECIFICATION

Volts: 120-277VAC

Average Rated Life: L70 @ 50,000hrs

Dimming: 0-10V

Beam Angle: 150°

CRI: >85


CCT: 3000/4000/5000K

Color: Dark Bronze

Ambient temp: -4°F to 104°F

DIMENSIONS

Weight (May vary with accessories)
22.7lbs (10.3kg)

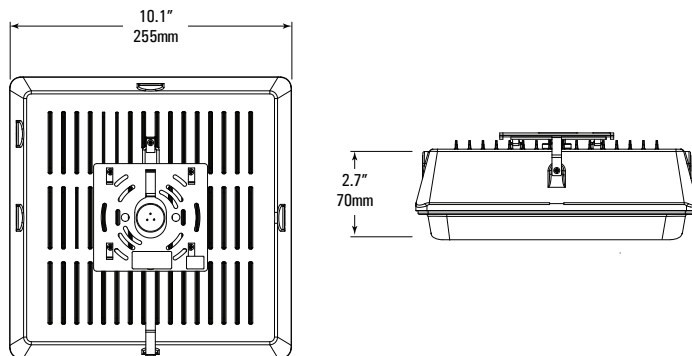

ORDERING CODE

LED CANOPY LIGHT

| | | | | | |
|--------|----|-----|---|---|----|
| QS-AMR | 80 | 345 | U | C | DB |
|--------|----|-----|---|---|----|

| | |
|--------|--|
| QS-AMR | Quickship Series |
| | QS-AMR Quickship AMR |
| 80 | Output |
| | 80 40/60/80W 5200/7800/10400Lm |
| 345 | LED CCT |
| | 345 3000/4000/5000K |
| U | Voltage |
| | U Universal 120V – 277V |
| | Accessories |
| | MS Plug and Play Motion Sensor 0 None |
| C | Mounting |
| | C Ceiling |
| DB | Finish |
| | DB Dark Bronze |



Application: Parking structures, storage areas, shopping malls, walkways, entryways, low roof security and much more



100 Duffy Ave, Hicksville NY 11801 . Phone: 917.563.7078 . www.sunledind.com
© 2024 Sunled Industries LLC. All Rights Reserved



Max Order Size 100pcs

QS-AMR



ORDERING CODE

LED CANOPY LIGHT

QS-AMR

80

345


U

C


DB

INSTALLATION INSTRUCTIONS


1. Loosen the screw to take off the mounting plate from the lamps

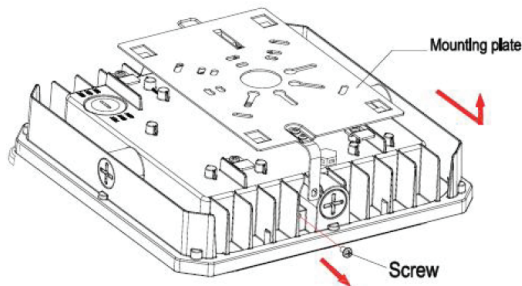


2. Screw the mounting plate to the ceiling

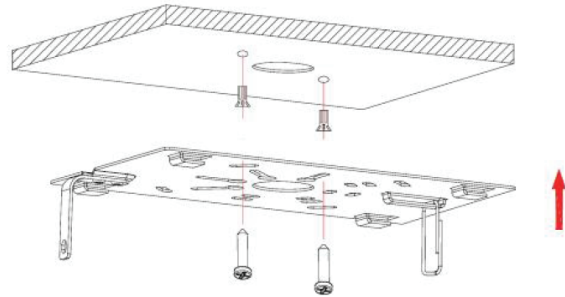

3. Hang the lamp on the ring so as to connect wires with terminal caps

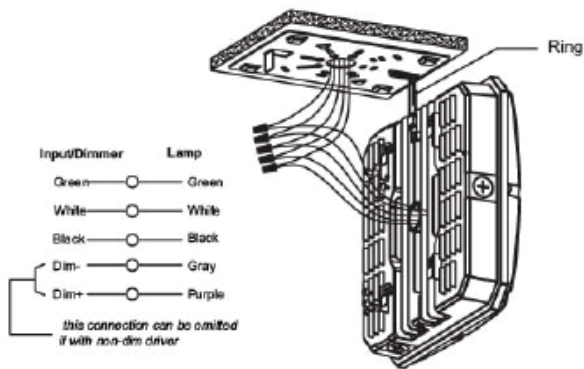

4. Hook up lamp on mounting plate

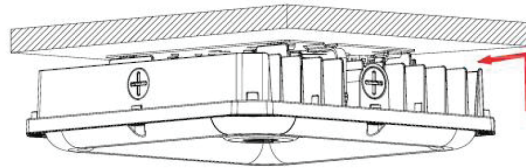

4. Secure the screws, installation completed

