QS-AMR

QuickShip

FEATURES

- Integral receptacle base as standard compatible with plug and play sensors
- Modern narrow profile design compliments confined surroundings
- Flat PMMA vandal resistant lens eliminates glare while maintaining efficiency with over 90% transmittance rate
- Watt and CCT selectable
- Surface or pendant mount
- Die-cast aluminum housing with die-cast backbox including four conduit entry points and knockout pattern for junction box or direct wall mounting.
- Hinged door for easy re assembly
- Wide beam angle of 150°

SPECIFICATION

Volts: 120-277VAC
Average Rated Life: L70 @ 50,000hrs
Dimming: 0-10V
Beam Angle: 150°
CRI: >85
CCT: 3500/4000/5000K
Color: Dark Bronze
Ambient temp: -4°F to 104°F

DIMENSIONS

Weight (May vary with accessories)
22.7lbs (10.3kg)

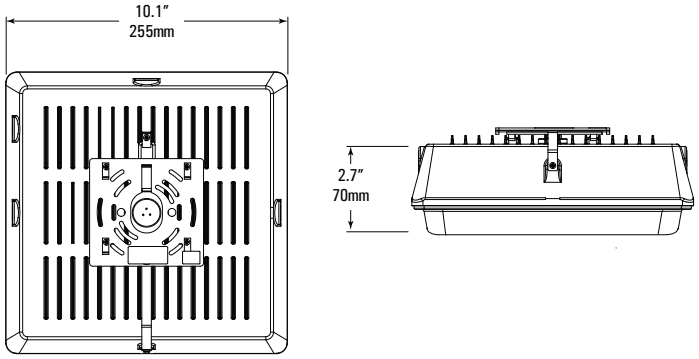

ORDERING CODE

LED CANOPY LIGHT

QS-AMR	80	345	U		C	DB

QS-AMR	**Quickship Series**	
	QS-AMR	Quickship AMR
100	**Output**	
	100	60/80/100W 8100/10800/13500Lm
345	**LED CCT**	
	345	3500/4000/5000K
U	**Voltage**	
	U	Universal 120V – 277V
	Accessories	
	MS	Plug and Play Motion Sensor
	0	None
C	**Mounting**	
	C	Ceiling
DB	**Finish**	
	DB	Dark Bronze

Application: Parking structures, storage areas, shopping malls, walkways, entryways, low roof security and much more

SUNLED INDUSTRIES

100 Duffy Ave, Hicksville NY 11801 . Phone: 917.563.7078 . www.sunledind.com
© 2024 Sunled Industries LLC. All Rights Reserved

5 YEARS WARRANTY | c UL us LISTED | IP65 | CCT SELECTABLE | POWER SELECTABLE | L80 50.000h

Max Orde-r Size 100pcs

QS-AMR

QuickShip

ORDERING CODE **LED CANOPY LIGHT**

QS-AMR	80	345	U		C	DB

INSTALLATION INSTRUCTIONS

1. Loosen the screw to take off the mounting plate from the lamps

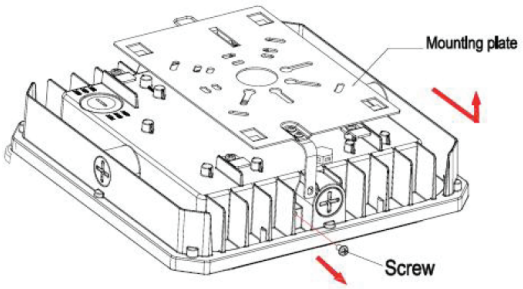

2. Screw the mounting plate to the ceiling

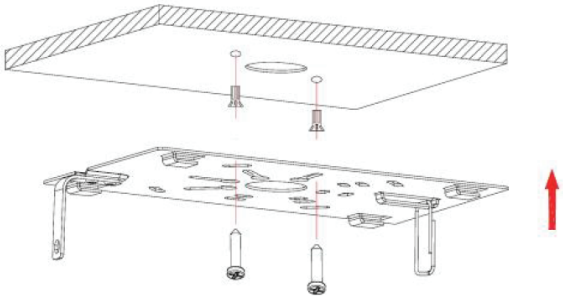

3. Hang the lamp on the ring so as to connect wires with terminal caps

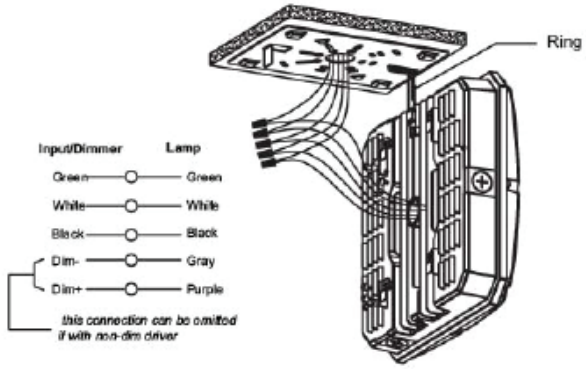

4. Hook up lamp on mounting plate

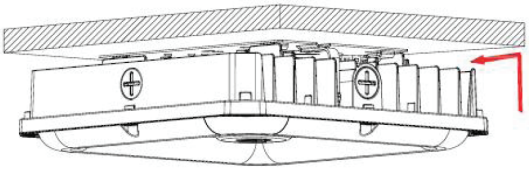

4. Secure the screws, installation completed

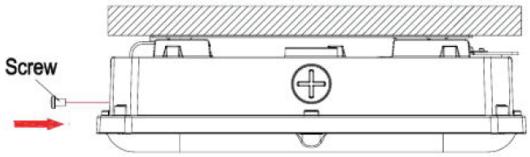

SUNLED INDUSTRIES

100 Duffy Ave, Hicksville NY 11801 . Phone: 917.563.7078 . www.sunledind.com
© 2024 Sunled Industries LLC. All Rights Reserved