



QS-CDW



Application: Security, pathway and perimeter lighting, entryways, walkways, commercial and educational buildings

DESCRIPTION

Cast in a modern low-profile design, Sunled's QS-CDW series is easily customizable to aesthetically blend in with any building, delivering a mix of architectural styling and illumination performance.

Available in two sizes, the QS-CDW family comes in 3,600 to 9,100 lumen packages with a wide, uniform distribution. It's ideal for illuminating commercial office buildings, warehouses, campuses, shopping malls and office complexes.

CONSTRUCTION

- Sealed die cast profile for outdoor applications.
- Casting thermally conducts LED heat to optimize performance and maximize operational life
- Suitable for applications requiring 3G testing, prescribed by ANSI C136.31

OPTICAL

- Light engines available in standard 5000 K configurations.
- Scalable Lumen Packages from 3,600 to 9,100 Lumens.
- Dark sky friendly zero up light distribution
- High performance UV stabilized optical grade polymer refractor lenses optimize distribution to achieve maximum spacing's, target lumens and superior light uniformity

SPECIFICATION

Volts: 120-277VAC

Average Rated Life: 50,000hrs

THD: <20% **PF:** >0.9

Distribution: Type 2

Operating Temperature: -40°F to 113°F

Dimming: 0-10V

ORDERING CODE

FULL CUTOFF WALL PACK

QS-CDW

50

U

T2

DB

** Specification subject to stock availability

QS-CDW

Quickship Series

QS-CDW Quickship Condor Wall

Output

27 27W/3600lm

45 45W/5800lm

70 70W/9100lm

50

LED CCT

50 5000K

U

Voltage

U Universal 120 – 277V

T2

Direct Optics

T2 Type II

DB

Body Color

DB Dark Bronze

Control

PE Dusk to Dawn Photocell

OS Occupancy Sensor

B Blank


Emergency

EM 8W/90min Emergency

0 None

PHOTOMETRICS

Type II

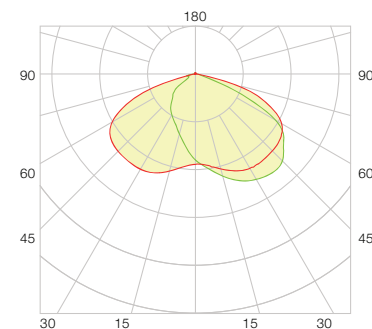

100 Duffy Ave, Hicksville NY 11801 . Phone: 917.563.7078 . www.sunledind.com
© 2024 Sunled Industries LLC. All Rights Reserved



Max Order Size 100pcs

QS-CDW



ORDERING CODE

FULL CUTOFF WALL PACK

QS-CDW

50

U

T2

DB

ACCESSORIES



PE
Dusk to Dawn
Photocell



OS
Occupancy
Sensor



EM
8W/90min Internal
Emergency


MOUNTING PLATE





Standard

The external portable mounting plate makes installation easy and simple with no requirement to drill or open fixture housing, greatly minimizing risk of water ingress

DIMENSIONS




27/45W
Small Size





Net Weight
27W: 5.6lbs
45W: 5.9lbs

4.6"
118mm



70W
Large Size



Net Weight
70W: 9.2lbs

4.6"
118mm

