QS-CDW

QuickShip

Application: Security, pathway and perimeter lighting, entryways, walkways, commercial and educational buildings

DESCRIPTION

Cast in a modern low-profile design, Sunled's QS-CDW series is easily customizable to aesthetically blend in with any building, delivering a mix of architectural styling and illumination performance.

Available in two sizes, the QS-CDW family comes in 3,600 to 9,100 lumen packages with a wide, uniform distribution. It's ideal for illuminating commercial office buildings, warehouses, campuses, shopping malls and office complexes.

CONSTRUCTION

- Sealed die cast profile for outdoor applications.
- Casting thermally conducts LED heat to optimize performance and maximize operational life
- Suitable for applications requiring 3G testing, prescribed by ANSI C136.31

OPTICAL

- Light engines available in standard 5000 K configurations.
- Scalable Lumen Packages from 3,600 to 9,100 Lumens.
- Dark sky friendly zero up light distribution
- High performance UV stabilized optical grade polymer refractor lenses optimize distribution to achieve maximum spacing's, target lumens and superior light uniformity

SPECIFICATION

Volts: 120-277VAC
Average Rated Life: 50,000hrs
THD: <20% **PF:** >0.9
Distribution: Type 2
Operating Temperature: -40°F to 113°F
Dimming: 0-10V

ORDERING CODE

FULL CUTOFF WALL PACK

QS-CDW		50	U	T2	DB	

** Specification subject to stock availability

QS-CDW	**Quickship Series**	
	QS-CDW	Quickship Condor Wall
	Output	
	27	27W/3600lm
	45	45W/5800lm
	70	70W/9100lm
50	**LED CCT**	
	50	5000K
U	**Voltage**	
	U	Universal 120 – 277V
T2	**Direct Optics**	
	T2	Type II
DB	**Body Color**	
	DB	Dark Bronze
	Control	
	PE	Dusk to Dawn Photocell
	OS	Occupancy Sensor
	B	Blank
	Emergency	
	EM	8W/90min Emergency
	0	None

PHOTOMETRICS

Type II

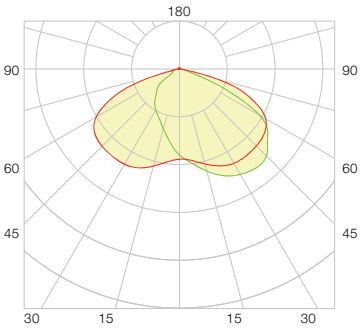

SUNLED INDUSTRIES

100 Duffy Ave, Hicksville NY 11801 . Phone: 917.563.7078 . www.sunledind.com
© 2024 Sunled Industries LLC. All Rights Reserved

5 YEARS WARRANTY | cULus LISTED | L80 50,000h | IP65 | DARK SKY APPROVED

Max Order Size 100pcs

QS-CDW

QuickShip

ORDERING CODE **FULL CUTOFF WALL PACK**

QS-CDW		50	U	T2	DB	

ACCESSORIES

PE
Dusk to Dawn Photocell

OS
Occupancy Sensor

EM
8W/90min Internal Emergency

MOUNTING PLATE

Standard
The external portable mounting plate makes installation easy and simple with no requirement to drill or open fixture housing, greatly minimizing risk of water ingress

DIMENSIONS

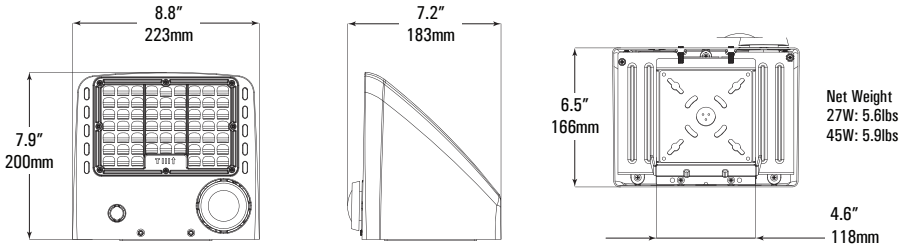

27/45W
Small Size

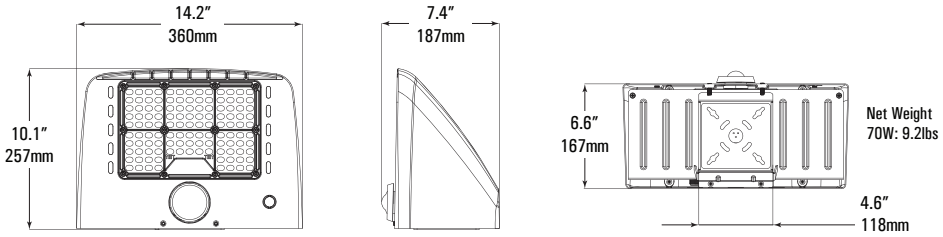

70W
Large Size

SUNLED INDUSTRIES

100 Duffy Ave, Hicksville NY 11801 . Phone: 917.563.7078 . www.sunledind.com
© 2024 Sunled Industries LLC. All Rights Reserved