



QS-DFR



DESCRIPTION

Cast in a traditional design, the QS-DFR LED wall mount luminaire offers a familiar shape, coupled with high-powered and energy efficient LEDs for all round reliability. Photoeye enables dusk to dawn operation, ideal for the safety and security of any facility

CONSTRUCTION

- Tempered UV coated lens provide outstanding performance, uniformity and glare control.
- Clear lens greatly improve the light utilization

OPTICS

- Scalable lumen packages from 1,800 to 2,700 Lumens.
- Light engines are available in standard 4000 K and 5000 K configurations.
- Suitable for operation in -40°F to 104°F ambient environments..
- Estimated 100,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations

SPECIFICATION


Volts: 120-277VAC

Average Rated Life: 100,000hrs

PF: >90%

THD: <20%

DIMENSIONS

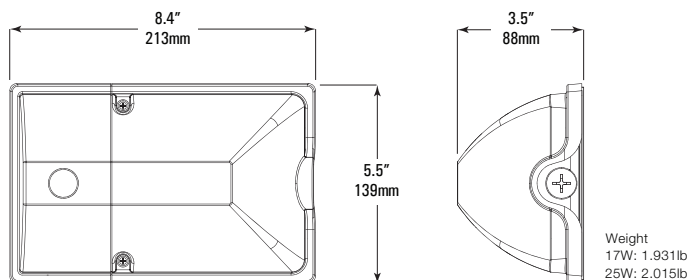

ORDERING CODE

LED MINI WALL PACK

QS-DFR

U PC S DB

** Specification subject to stock availability

QS-DFR

Quickship Series

QS-DFR Quickship DFR

Output

17 17W/1800lm
25 25W/2700lm

LED CCT

40 4000K
50 5000K

U

Voltage

U Universal 120 – 277V

PC

Direct Optics

PC Polycarbonate Lens

S

Mounting

S Surface Mount

DB

Body Color

DB Dark Bronze

Control

PC Dusk to Dawn Photocell
B Blank



Application: Security, pathway and perimeter lighting, building entryways, walkways and much more



100 Duffy Ave, Hicksville NY 11801 . Phone: 917.563.7078 . www.sunledind.com
© 2024 Sunled Industries LLC. All Rights Reserved



Max Order Size 100pcs