



QS-DOT



DESCRIPTION

The ultra slim LED downlights/surface mini panel comes with a separate steel encased driver in a watertight seal. Low profile design, specification grade finish

FEATURES

- 1" thin for tight ceiling spaces
- Airtight and type IC rated, no housing required
- Featuring tunable white color temperature 3000K, 4000K and 5000K
- Snap-in mounting springs and easy wiring access for fast and easy installation, saving on labour costs
- Junction box included, no additional hardware needed
- Damp location rated and compatible with approved dimmers
- ETL listed, reliable quality and safe operation
- Suitable for damp locations
- Durable, die cast aluminum alloy body for optimal heat dissipation
- White, Nickel or Black for choice — scratch resistant and smooth finish

SPECIFICATION


Volts: 100-130VAC

Average Rated Life: L70/50,000hrs

CCT: 3000K/4000K/5000K

PF: >0.9

Beam Angle: 110°

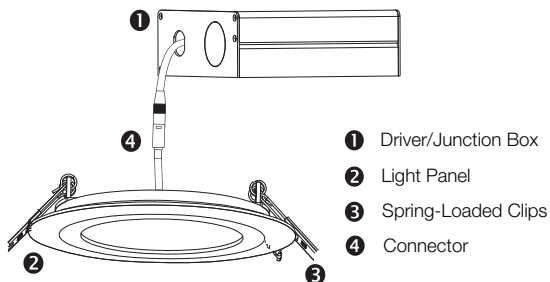

ORDERING CODE

SLIM LED DOWNLIGHT

QS-DOT

F

P

D

QS-DOT

Quickship Series

QS-DOT Quickship DOT

Size

4 4"/10W/700Lm
6 6"/12W/900Lm
8 8"/18W/1350Lm (Round Only)

Shape

S Square
R Round

LED CCT

30 3000K
50 5000K
345 3000/4000/5000K (4/6" only)

F

Voltage

F Fixed 100-130VAC

P

Direct Optics

P Frosted PMMA Lens

Trim Color

W White
B Black
N Brushed Nickel

D

Dimming

D Standard 0-10V

TRIM COLOR AVAILABLE



W
White



B
Black



N
Nickel



Application: Commercial, residential hospitality



100 Duffy Ave, Hicksville NY 11801 . Phone: 917.563.7078 . www.sunledind.com
© 2024 Sunled Industries LLC. All Rights Reserved



Max Order Size 300pcs

QS-DOT

DIMENSIONS



ORDERING CODE

SLIM LED DOWNLIGHT

QS-DOT

F

P

D

