



QS-HCT



DESCRIPTION

Featuring classic form, the QS-HCT Series wall pack offers a traditional profile suitable for a wide range of mounting heights. It's die-cast aluminum housing and vandal tempered boroscillate lens allow it to be used in adverse environments with ease and efficiency

FEATURES

- IK08 prismatic tempered glass cover lens
- Die-cast aluminum housing for best heat resistant
- Ingress protection rating of IP65 for dust and water
- Adjustable Wattage to meet different customer demands
- Enhanced surge protection: Line-earth: 4KV; Line-line: 6KV

SPECIFICATION

Volts: 120-277VAC

Average Rated Life: 50,000hrs

Beam Angle: 95°x105°


CRI: >70

CCT: 3500/4000/5000K

Color: Dark Bronze

Ambient temp: -22°F to 122°F

DIMENSIONS

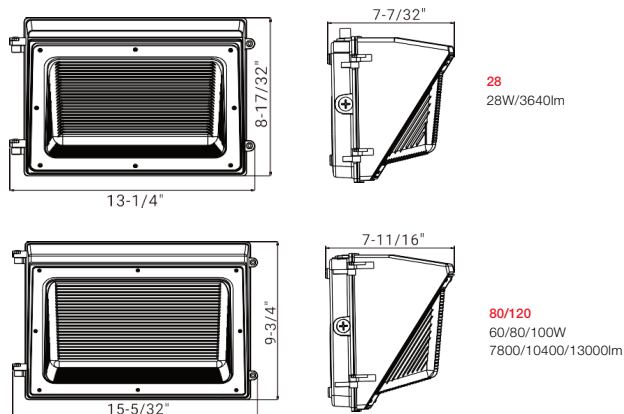

ORDERING CODE

LED WALL PACK

QS-HCT

U B DB D PC

QS-HCT

Quickship Series

QS-HCT Quickship HCT

Output

28 28W (4 or 5000K)
3640lm

80 45/60/80W
5850/7800/10400lm

120 80/100/120W
10400/13000/15600lm

LED CCT

345 3500/4000/5000K (80/120W Only)

4 4000K

5 5000K

U

Voltage

U Universal 120V – 277V

B

Direct Optics

B Tempered Boroscillate Glass

DB

Finish

DB Dark Bronze

D

Dimming

D 0-10V Dimming

PC

Control

PC With Photocell Installed



Application: security, pathway and perimeter lighting, building entryways, walkways and much more



100 Duffy Ave, Hicksville NY 11801 . Phone: 917.563.7078 . www.sunledind.com
© 2024 Sunled Industries LLC. All Rights Reserved



Max Order Size 100pcs