

# QS-NBL



**Application:** Office, school, conference room, hospital, and more commercial spaces

## DESCRIPTION

QS-NBL LED Backlit Panel is a direct lighting product with high lumen efficiency that is more cost effective compared to edgelit technology

Frosted optical lens offers maximum uniformity and exceptional thermal management with an integrated one piece iron plate

## FEATURES

- Uniform light effect with optic lens
- Integrated iron plate design provides excellent thermal management
- Direct light design provides more even light distribution and longer lifespan
- 130lm/w high lumen efficiency

## SPECIFICATION

**Volts:** AC100-277V

**Average Rated Life:** L70/50,000hrs

**Environment Location:** IP20 Indoor

**CRI:** >80

**Beam Angle:** 120°

**Emergency:** 3hr/120-347V

**Ambient temp:** -4°F to 122°F

## OPTIONAL ACCESSORIES



**S**  
Surface Mount Kit



**P**  
Pendant Kit



**E**  
Emergency Battery Backup

## ORDERING CODE LED BACKLIT PANEL LIGHT

QS-NBL 345 U P W D

### QS-NBL Quickship Series

**QS-NBL** Quickship NBL

#### Size

<b>1x4</b>	1x4ft (47.7"x11.6"x1.26") 20/30/40W 2600/3900/5200Lm
<b>2x2</b>	2x2ft (23.7"x23.7"x1.26") 20/30/40W 2600/3900/5200Lm
<b>2x4</b>	2x4ft (23.7"x47.8"x1.26") 30/40/50W 3900/5200/6500Lm

### 345 LED CCT

**345** 3000/4000/5000K

### U Voltage

**U** Universal 100V – 277V

### P Direct Optics

**PMMA** Frosted PMMA Lens

#### Mounting

<b>S</b>	Surface
<b>R</b>	Recessed
<b>P</b>	Pendant

### W Body Color

**W** White

### D Dimming

**D** Standard 0-10V

#### Emergency

<b>E1</b>	8W Emergency – Battery
<b>E2</b>	15W Emergency – Battery
<b>0</b>	None

Slide switch for color selection



Slide switch for power selection



100 Duffy Ave, Hicksville NY 11801 . Phone: 917.563.7078 . www.sunledind.com  
© 2024 Sunled Industries LLC. All Rights Reserved



Max Order Size 300pcs

# QS-NBL



ORDERING CODE **LED BACKLIT PANEL LIGHT**

QS-NBL

345


U

P


W

D


## WIRING

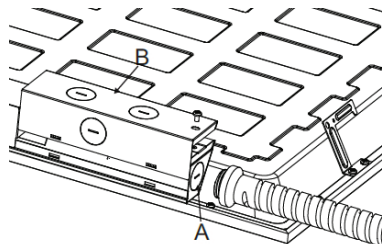

Remove the knockout hole on terminal box with screw driver

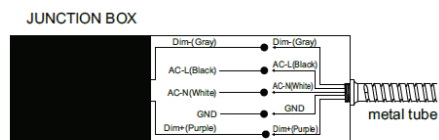

Connect wires as shown in picture

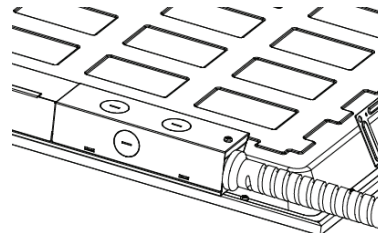

Cover the driver box and tighten it

