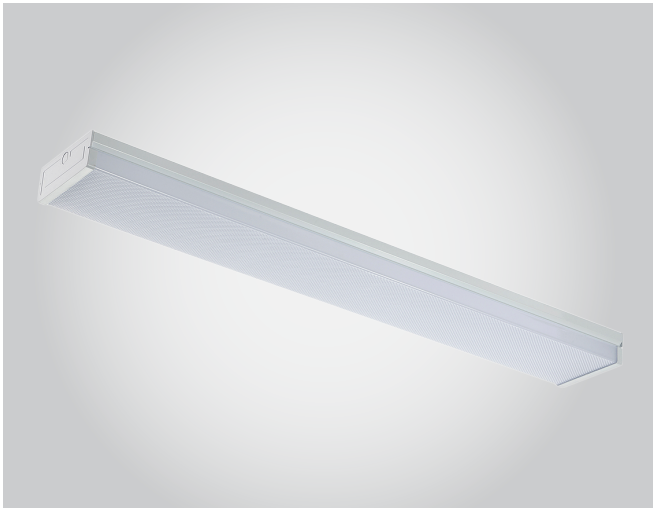

QS-P5W

QuickShip

FEATURES

- Acrylic lens, available in 4' and 8'
- Suitable for damp location
- 8' fixture comes with one piece of 8' lens
- High energy efficiency: 40W replace 2x32W T8 and 80W replace 4x32W T8 fluorescent lamps
- DLC Premium: lumen efficiency to 130 lm/w
- Steel housing equipped with heat resistant prismatic lens
- Chain suspended or surface mount options
- Available with emergency battery backup kit or motion sensor
- 0-10V dimmable

SPECIFICATION

Volts: 100-277VAC
Power Factor: >0.9
THD: <10%
Average Rated Life: 50,000
Beam Angle: 120°
CRI: >80
Housing Color: White
Ambient temp: -10°F to 110°F

DIMENSIONS

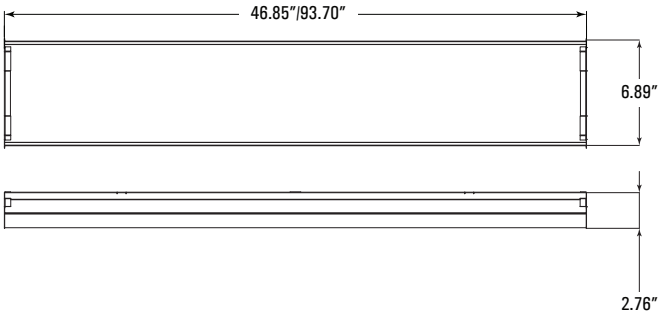

ORDERING CODE

LED WRAPAROUND

QS-P5W		345	U	PC		W	D	

QS-P5W	**Quickship Series**	
	QS-P5W	Quickship P5W
	Output	
	40	40W/5200Lm—4ft
	80	80W/10400Lm—8ft
345	**LED CCT**	
	345	3500/4000/5000K
U	**Voltage**	
	U	Universal 100 – 277V
PC	**Direct Optics**	
	PC	Prismatic Lens
	Mounting	
	P	Chain Suspended
	S	Surface Mount
W	**Body Color**	
	W	White
D	**Dimming**	
	D	0-10v Dimmable
	Control	
	NP	Blank/No Sensor
	MS	Microwave Sensor
	Emergency	
	E	Emergency—Battery
	0	None

Application: Retail stores, supermarket, school/institution, office buildings, library, commercial space

SUNLED INDUSTRIES

100 Duffy Ave, Hicksville NY 11801 . Phone: 917.563.7078 . www.sunledind.com
© 2024 Sunled Industries LLC. All Rights Reserved

5 YEARS WARRANTY | CRI >80 | cULus LISTED | L80 50.000h | CCT SELECTABLE

Max Order Size 100pcs