



QS-P5W



FEATURES

- Acrylic lens, available in 4' and 8'
- Suitable for damp location
- 8' fixture comes with one piece of 8' lens
- High energy efficiency: 40W replace 2x32W T8 and 80W replace 4x32W T8 fluorescent lamps
- DLC Premium: lumen efficiency to 130 lm/w
- Steel housing equipped with heat resistant prismatic lens
- Chain suspended or surface mount options
- Available with emergency battery backup kit or motion sensor
- 0-10V dimmable

SPECIFICATION

Volts: 100-277VAC

Power Factor: >0.9

THD: <10%

Average Rated Life: 50,000


Beam Angle: 120°

CRI: >80

Housing Color: White

Ambient temp: -10°F to 110°F

DIMENSIONS

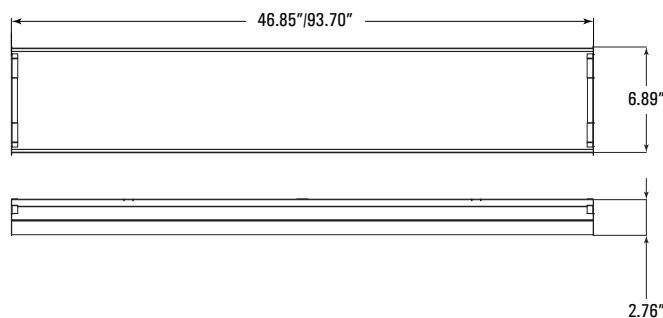

ORDERING CODE

LED WRAPAROUND

QS-P5W

345

U

PC

W

D

QS-P5W

Quickship Series

QS-P5W Quickship P5W

Output

40 40W/5200Lm—4ft

80 80W/10400Lm—8ft

345

LED CCT

345 3500/4000/5000K

U

Voltage

U Universal 100 – 277V

PC

Direct Optics

PC Prismatic Lens

Mounting

P Chain Suspended

S Surface Mount

W

Body Color

W White

D

Dimming

D 0-10v Dimmable

Control

NP Blank/No Sensor

MS Microwave Sensor

Emergency

E Emergency—Battery

0 None



Application: Retail stores, supermarket, school/institution, office buildings, library, commercial space



100 Duffy Ave, Hicksville NY 11801 . Phone: 917.563.7078 . www.sunledind.com
© 2024 Sunled Industries LLC. All Rights Reserved



Max Order Size 100pcs