



QS-P5WS



FEATURES

- Single piece acrylic lens, available in 2' and 4'
- Damp location rated
- Narrow width profile suitable for small spaces such as stairways
- DLC Premium: lumen efficiency to 110 lm/w
- Steel housing equipped with heat resistant prismatic lens
- Chain suspended or surface mount options
- Available with emergency battery backup kit or motion sensor
- Featuring tunable white 3000K, 4000K and 5000K CCT
- 0-10V dimmable

SPECIFICATION

Volts: 100-277VAC

Power Factor: >0.9

THD: <10%

Average Rated Life: 50,000


Beam Angle: 120°

CRI: >80

Housing Color: White

Ambient temp: -10°F to 110°F

DIMENSIONS

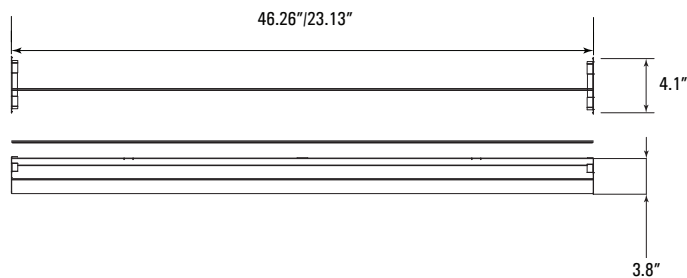

ORDERING CODE

SLIM LED WRAPAROUND

QS-P5WS

345

U

PC

W

D

QS-P5WS

Quickship Series

QS-P5WS Quickship P5WS

Output

18 18W/1980Lm—2ft

32 32W/3520Lm—4ft

345

LED CCT

345 3000/4000/5000K

U

Voltage

U Universal 100 – 277V

PC

Direct Optics

PC Prismatic Lens

Mounting

P Chain Suspended

S Surface Mount

W

Body Color

W White

D

Dimming

D 0-10V Dimmable

Control

NP Blank/No Sensor

MS Bi Level Sensor

Emergency

E Emergency—Battery

0 None



Application: Retail stores, supermarket, school/institution, office buildings, library, commercial space



100 Duffy Ave, Hicksville NY 11801 . Phone: 917.563.7078 . www.sunledind.com
© 2024 Sunled Industries LLC. All Rights Reserved



Max Order Size 100pcs