

QS-PFMD



DESCRIPTION

The QS-PFMD Series is a line of linear products, created with architects and lighting designers in mind. Combining sleek seamless lines, brilliant color quality and ultra-smooth dimming, it is a modern solution designed to enhance both form and function.

FEATURES

- Featuring tunable white color temperature: 3000K, 4000K and 5000K
- Adjustable pendant hangar kit with canopy included as standard
- The IP40 rating offers extra protection for damp applications
- Available in white finish
- Aluminum heat sink for efficient heat dissipation
- Linkable: maximum of 7 pcs can be linked together

SPECIFICATION

Volts: 110-277VAC

Power Factor: >0.9

Average Rated Life: 50,000hrs

Dimming: 0-10V

Beam Angle: 106.4°


CRI: >80

CCT: 3000K/4000K/5000K

Ambient temp: -8°F to 105°F

DIMENSIONS

Weight: 36.0lbs (16.3kg)

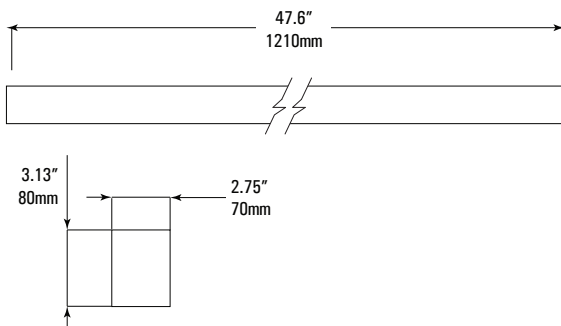

ORDERING CODE

DIRECT LINEAR LIGHT

QS-PFMD

345

U

LUD

L

W

QS-PFMD

Quickship Series

QS-PFMD Quickship PFMD

Output

25 2ft—25W / 3250Lm

50 4ft—50W / 6500Lm

345

LED CCT

345 3000/4000/5000K
CCT Selectable

U

Voltage

U Universal 110 – 277V

LD

Direct Optics

LD Linear Down

Mounting

P Pendant

S Surface Mount

W Wall Mount

T T-Grid

L

Linkage

L Linkable

W

Housing Color

W White



Application: Offices, schools, showrooms, airports, retail locations, and healthcare facilities



100 Duffy Ave, Hicksville NY 11801 . Phone: 917.563.7078 . www.sunledind.com
© 2024 Sunled Industries LLC. All Rights Reserved



Max Order Size 200pcs