

QS-VNS



Application: offices, schools, showrooms, airports, retail locations, and healthcare facilities

DESCRIPTION

The QS-VNS slim LED troffer features a popular center basket design offering a clean, versatile style and volumetric distribution. It is typically used to replace 2x2 and 2x4 fluorescent light fixtures.

FEATURES

- Featuring tunable white 3000K, 4000K and 5000K color temperature
- Adjustable Wattage to meet different customer demands
- 0-10V Dimmable
- Aluminum heatsink body for efficient heat dissipation
- Diffusers are extruded from impact modified acrylic for increased durability
- High efficiency 130lm/w DLC premium listed
- 5 year limited warranty

SPECIFICATION

Volts: AC110-277V

Average Rated Life: L70/50,000hrs



Environment Location: IP20 Indoor

CRI: >80

Beam Angle: 110°

Emergency: 3hr/120-347V

Ambient temp: -4°F to 105°F

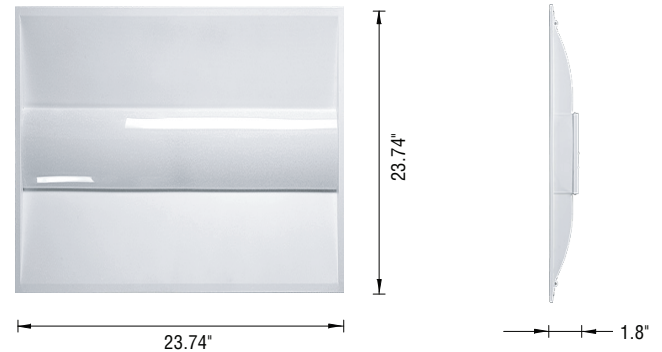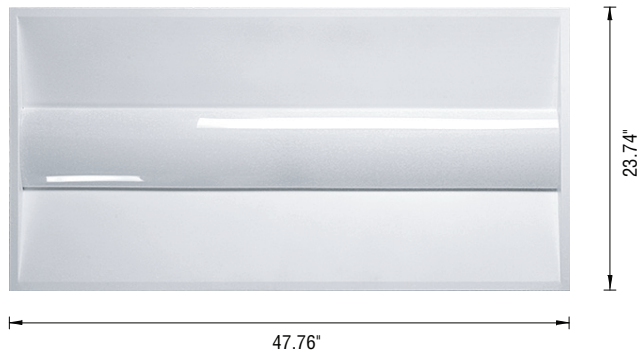

ORDERING CODE

SLIM LED TROFFER

QS-VNS 345 U R W D V

QS-VNS Quickship Series

QS-VNS Quickship VNS

Size

2x2 2x2ft
25/35W
3250/4550Lm
2x4 2x4ft
33/40/50W
4290/5200/6500Lm

345 LED CCT

345 3000/4000/5000K

U Voltage

U Universal 120V – 277V

R Mounting

R Recessed

W Body Color

W White

D Dimming

D Standard 0-10V

V Sensor

IMS Internal Motion Sensor
NP None

Emergency

E1 8W Emergency – Battery
E2 15W Emergency – Battery
0 None



100 Duffy Ave, Hicksville NY 11801 . Phone: 917.563.7078 . www.sunledind.com
© 2024 Sunled Industries LLC. All Rights Reserved



Max Order Size 300pcs