



QS-YMA



CONSTRUCTION

- Fin design, and slotted body construction improves heat dissipation
- Die formed of 0.6mm cold-rolled steel body
- All steel surface painted post fabrication with high gloss backed white matte powder coat.
- High transmittance frosted acrylic diffuser
- Fully recessed luminaire fits standard t-grid ceilings.

ELECTRICAL

- 120-277V input voltage
- Class 2 high efficiency LED driver, with a standard 1-10V dimming
- Enhanced ultra smooth dimming down to 10% compatible with most Lutron and Leviton controllers
- 5 years warranty

SPECIFICATION

Volts: 100-277VAC

Average Rated Life: L70/50,000hrs


PF: 0.9

Beam Angle: 90°

CRI: >80

Ambient temp: 10°F to 110°F

DIMENSIONS

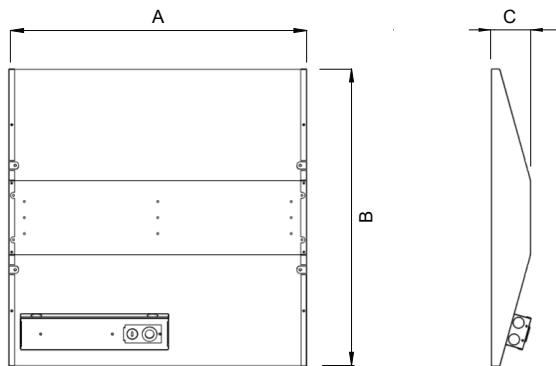

ORDERING CODE

PREMIUM LED TROFFER

QS-YMA

U

D

QS-YMA

Quickship Series

QS-YMA Quickship YMA

Size

2x2 2x2ft/35W/4375Lm

2x4 2x4ft/45W/5625Lm

LED CCT

345 3000/4000/5000K

U

Voltage

U Universal 120V – 277V

Mounting

RT Recessed t-grid

RF Recessed flange kit

Control

MS Microwave Sensor

0 None

D

Dimming

D Standard 0-10V

Emergency

EM Emergency Battery Backup

0 None



Application: Schools, hospitals, retail, commercial

Dimension	2x2ft	2x4ft
A	23.8"	47.6"
B	23.8"	23.8"
C	3.15"	3.15"



100 Duffy Ave, Hicksville NY 11801 . Phone: 917.563.7078 . www.sunledind.com
© 2024 Sunled Industries LLC. All Rights Reserved



Max Order Size 100pcs