QS-INT

QuickShip

FEATURES

- Reduced UGR provides a visually comfortable light and optimal uniformity
- Best choice for replacing fluorescent lamps with high efficiacy
- 90° distribution
- Die cast thick gauge aluminium alloy construction
- Emergency battery backup support
- Standard 1-10V dimming
- Steel wire rope (standard), pendant or surface mounting available
- High-performance driver features over-voltage, under-voltage, short-circuit and over temperature protection
- Suitable for multiple mounting applications
- Twist on plug and play motion sensor

SPECIFICATION

Volts: 120-277VAC/347-480VAC
Dimming: 0-10V
Average Rated Life: 50,000hrs
Ambient temp: -40°F to 131°F
PF: >90% **THD:** <20%

PHOTOMETRICS

90°



ORDERING CODE

LED LINEAR HIGHBAY

QS-INT		S	

** Specification subject to stock availability

QS-INT	**Quickship Series**	
	QS-INT	Quickship INT
	Output	
	90	90W/12700Lm
	130	130W/18600Lm
	175	180W/19200Lm
	210	210W/30600Lm
	210S	90/130/180/210W 13600/20000/25000/30000Lm
	270	270W/37000Lm
	300	300W/41500Lm
	LED CCT	
	45	4000/5000K CCT Selectable (Available in 210W)
	40	4000K
	50	5000K
	Voltage	
	12	120 – 277V
	48	347 – 480V
S	**Diffuser**	
	S	Semi Frosted
	Mounting	
	W	Wire Suspended
	P	Pendant
	S	Surface
	Control	
	NP	Blank/No Sensor
	MS	Microwave Sensor
	Emergency	
	E	Emergency Battery
	0	None

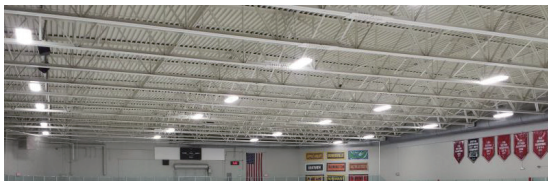

Application: Commercial, retail and institutional applications including gymnasiums, factories and warehouses

SUNLED INDUSTRIES

100 Duffy Ave, Hicksville NY 11801 . Phone: 917.563.7078 . www.sunledind.com
© 2024 Sunled Industries LLC. All Rights Reserved

5 YEARS WARRANTY · DAMP LISTED · cULus LISTED · L80 50,000h · CCT SELECTABLE · POWER SELECTABLE

Max Order Size 100pcs

QS-INT

QuickShip

ORDERING CODE **LED LINEAR HIGHBAY**

QS-INT		S	

DIMENSIONS

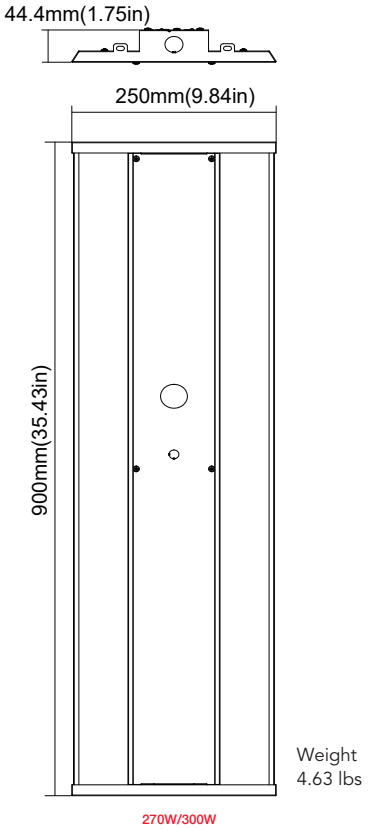

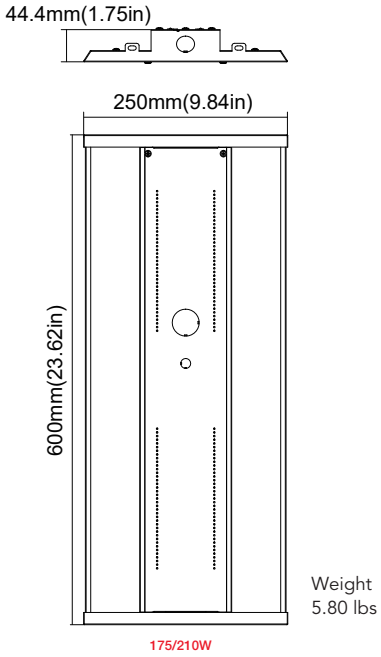

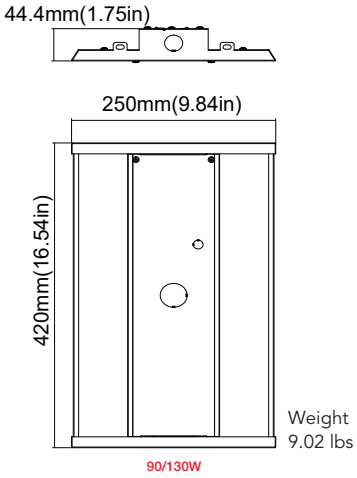

ACCESSORIES

45
4/5000K
CCT Selectable

MS
Plug and Play
Motion Sensor

E
Emergency Bettery
Backup

SUNLED INDUSTRIES

100 Duffy Ave, Hicksville NY 11801 . Phone: 917.563.7078 . www.sunledind.com
© 2024 Sunled Industries LLC. All Rights Reserved