

LUMINA

Flush Slim Canopy Light



Applications: Parking garages, transport and logistics, gas stations and much more

PERFORMANCE SUMMARY

The Lumina Series LED Canopy Light offers outstanding value and features a range of energy efficient, easy to install, highly reliable fixtures backed by a 5 year limited warranty and industry leading product support.

With it's traditional design and slim profile, Lumina LED Canopy Lights are ideal for easily and discreetly illuminating any canopy/soffit space while dramatically reducing energy consumption.

Construction

- 1-1/4" slim optical unit appearing flush on canopy
- Thin profile and white colour make it virtually invisible throughout the day assuring that attention is directed to the structure
- Die cast thick gauge aluminium alloy construction
- Surface finished with a proprietary powercoat, withstanding harsh industrial conditions without cracking or peeling
- High output polycarbonate lens providing uniform light output
- Anti yellowing anti UV and fire resistant finish and lens

Electrical

- 140lm/W operating efficiency
- Selectable SKUs offer 4 wattages selections at 25% intervals
- Delivered lighting output up to 23,000 median lumens
- 0-10V dimming option as standard
- 10kV built in surge protection

Specification

Volts: AC100-277/200-480V
 Beam Angle: 110°
 Average Rated Life: 50,000hrs
 Environment Location: IP65
 Surge Protection: 10kV
 Ambient temp: -4°F to 131°F
 CRI: >RA70


PRODUCT CODE

Example Lumina cat.100.150.60.C.DIM

Model No	Voltage (V)	Wattage (W)	Color Temp	Mounting	Options
Lumina	100 - 100-277V	100 - Lumen Selectable	30 - 3,000K	C - Ceiling	DIM - 0-10V Dimmable
		480 - 200-480V	4,350-15,400 lms / 30-100W	40 - 4,000K	
	480 - 200-480V	150 - Lumen Selectable	50 - 5,000K		EM - Emergency Backup
		11,200-23,200 lms / 80-150W	60 - 6,000K		0 - None



PHOTOMETRICS

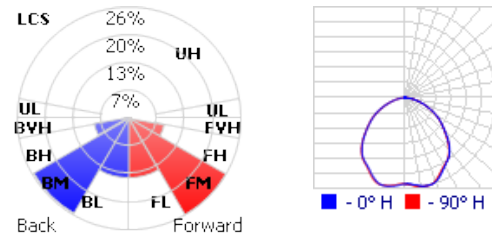

DIMENSIONS

Weight: (May vary with accessories)
 19.8lbs (9.0kg)

