

EAGLE XL

Full Cutoff Wallpack



Applications: Commercial buildings, apartments, schools, hotels, public areas, schools, hospitals

PERFORMANCE SUMMARY

Capable of delivering up to 15,600 lumens, the Eagle XL Series is high-output, wall-mounted luminaire that is powerful but precise, producing sites that make a distinct impression with dramatic results.

The luminaire is designed for mounting heights of up to 30 feet and provides enhanced flexibility for luminaire control and area-specific light levels

Features

- Exceptional operating efficiency of 130lm/W
- Dark sky friendly with minimal uplight of less than 5% total lumen output illuminating above 900
- On board field selectable, 4 way power control
- High impact die cast aluminum body with UV resistant finish
- Philips LumiLED PCB available in IES type 2/3 optics
- IP65 polycarbonate refractor lens deliver exceptional coverage and uniformity while protecting inside electronics
- Equipped with integral microwave sensors and daylight control for optimal energy savings
- 4W/1.5hr emergency battery backup option rated up to -22°F
- Tunable CCT switch from warm white (3000k) to daylight (4000k) to cool white (5000k)
- DLC Premium 5.0 qualified product

Specification

Volts: AC120-277V
 Average Rated Life: 50,000hrs
 CRI: RA70
 Weight: 4-9.9lb
 Environment Location: IP65
 Operating Temp: -22°F to 113°F
 Surge: 2kV line neutral
 Dimming: 0-10V

PRODUCT CODE



Example Eagle XL cat. 4053BRDMEM

Model No	Wattage (W)	CCT (°K)	Distribution	Finish	Control	Accessories
Eagle XL	30 - 30W/3,900 lms	345 - CCT Changeable	2 - Type 2	BR - Bronze	DM - Daylight photocell control	EM - 4W/1.5hr emergency battery backup
	40 - 40W/5,200 lms	3000/4000/5000	3 - Type 3	BK - Black	0 - None	FS - Field selectable power switch
	50 - 50W/6,500 lms	3 - 4000				0 - None
	60 - 60W/7,800 lms	4 - 5000				
	80 - 80W/10,400 lms	5 - 5000				
	100 - 100W/13,000 lms					
	120 - 120W/15,600 lms					





PHOTOMETRICS

Type 2



Type 3




EAGLE XL


Full Cutoff Wallpack

DIMENSIONS

30-80W




230mm (9.1")




221mm (8.7")

171mm (6.7")

100/120W

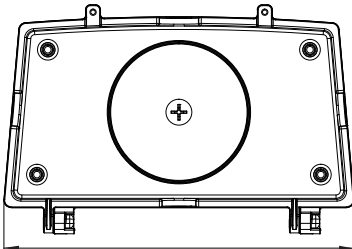

280.4mm (11.05")



234mm (9.2")

183.3mm [7.2223]

OPTIONS

Daylight/Photocell (DM)



Field Selectable Power Control (FS)



Tunable CCT Switch (345)

