



QS-PR5



DESCRIPTION

The Linear Strip is a high quality low profile fixture. The performance lens distribute light evenly when mounted vertically or horizontally. A longer than average life span can help save money on maintenance and energy cost. The linear strip is lightweight and easy to install.

FEATURES

- Available in 2', 4' and 8'
- 8' fixture comes with one piece of 8' lens
- High energy efficiency: 32W replace 2x32W T8 and 64W replace 4x32W TB fluorescent lamps
- DLC Premium: lumen efficiency to 130 lm/w
- Steel housing with frosted lens
- Aircraft cable pendant or surface mount options
- Suitable for damp location

SPECIFICATION

Volts: 110-277VAC

Power Factor: >0.9

THD: <20%

Average Rated Life: 50,000


Beam Angle: 120°

CRI: >80

Housing Color: White

Ambient temp: -10°F to 110°F

DIMENSIONS

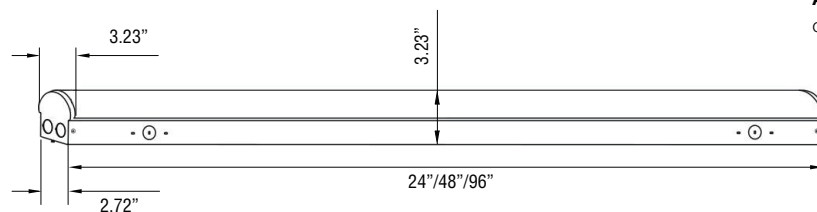

ORDERING CODE

LED LINEAR STRIP

QS-PR5

345

U

PC

D

QS-PR5

Quickship Series

QS-PR5 Quickship PR5

Size

2	2ft—20W 2600Lm
4	4ft—20/30/40W 2600/3900/5200Lm
8	8ft—40/60/80W 5200/7800/10400Lm

345

LED CCT

345 3000/4000/5000K

U

Voltage

U Universal 110 – 277V

PC

Direct Optics

PC Polycarbonate Lens

Mounting

P Aircraft Cable Pendant
S Surface Mount

Sensor

MS Internal Microwave Sensor
NP None

D

Dimming

D 0-10v Dimmable



Application: Retail stores, supermarket, school/institution, office buildings, library, commercial space



100 Duffy Ave, Hicksville NY 11801 . Phone: 917.563.7078 . www.sunledind.com
© 2024 Sunled Industries LLC. All Rights Reserved



Max Order Size 200pcs